


# PAR 1519 ZOOM

**Par 1519 Zoom** is a 19pcs x 15Watt RGBW 4in1 LED par light with motorized zoom. The LEDs can be controlled in 3 separate zones. It's full aluminum housing, 15° - 60° zoom range, high brightness output, light weight body makes it easy to handle and install. The fixture also come with power-con in & out connection and LCD display.

## Key Features:

- 19 x 15W 4in1 LEDs
- RGBW LED color mixing
- Motorized zoom from 15° - 60°
- 3 separate LED zones controllable
- Auto, master-slave, sound activate operation
- Full aluminum housing
- 5/10/16/32 DMX channels
- Powercon in & out connection, fixtures linkable
- Various built-in color marcos
- Flicker free for TV and Film
- Double bracket design
- Control panel with LCD display

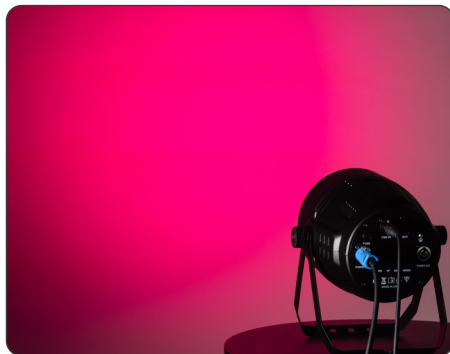

## PHYSICAL

Length: 280 mm (11 in.)  
 Width: 215 mm (8.5 in.)  
 Height: 330 mm (13 in.)  
 Net Weight: 4.5 kg (9.9 lb.)

## DYNAMIC EFFECTS

Color mixing: RGBW 4in1 LEDs  
 Three separate LED zones controllable  
 Zoom: 15° - 60° motorized  
 Electronic dimming: 0 – 100%  
 Strobe and pulse effects: Variable speed and action, random strobe

## CONTROL AND PROGRAMMING

Control options: DMX 512, auto program, sound, master-slave  
 DMX channels: 5/10/16/32  
 DMX address setting: Control panel with LCD display  
 DMX compliance: USITT DMX512-A

## OPTICS

Light source: 19 x 15Watt LEDs  
 LED lifetime: 50,000 hours avg.\*  
 \*LED Life may vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming

## CONSTRUCTION

Housing: Aluminum  
 Color: Black  
 Environment: IP20 indoor use

## INSTALLATION

Location: Dry location only, must be fastened to surface or structure  
 Orientation: Any  
 Minimum distance to combustible materials: 0.3 m (1.0 ft.)

Minimum distance to illuminated surfaces: 3 m (9.8 ft.)

## CONNECTIONS

AC power in, thru: PowerCon in & out  
 DMX data in/thru: 3-Pin XLR in & out(5-Pin optional)

## ELECTRICAL

AC power: 100–240 V nominal, 50/60 Hz  
 Power supply unit: Auto ranging power unit

## TYPICAL POWER AND CURRENT

230 V, 50 Hz: 230Watt max.  
 Allow for a deviation of +/- 10%.

## THERMAL

Cooling: Forced ventilation with fans  
 Maximum ambient temperature (Ta max.): 40° C (104° F)  
 Minimum ambient temperature (Ta min.): 5° C (41° F)

## SHIPPING INFORMATION

**In carton:**  
 Carton dimensions: 280 x 280 x 390 mm (11 x 11 x 15.4 in.)  
 Gross weight: 5 kg (10 lbs.)